

SP Series Cabinet

Battery back-up cabinets for traffic applications

Overview

Clary UPS peripheral cabinets are manufactured to the highest standards. Clary enclosures provide a safe watertight environment for traffic control systems. All cabinets are fully ventilated and made to accept generator input. Clary cabinets are NEMA 3R rated and can be manufactured to Caltrans, TEES standards. Clary can deliver standard cabinets or can custom configure them to meet your individual specifications.




Features

- Manufactured from .125" thick 5052-H32 aluminum
- Complete double flanged doorframe
- Provisions for mounting forced air fan system with filtered input air
- Stainless steel external hardware
- Interior finish is anodize coating, Type II per MIL-A-8625C
- Optional CBB-123 base skirt
- Optional CBT-123 thermostat and fan
- Model CBS-127 corbin lock installed
- Model CBS-128 best lock installed





Specifications

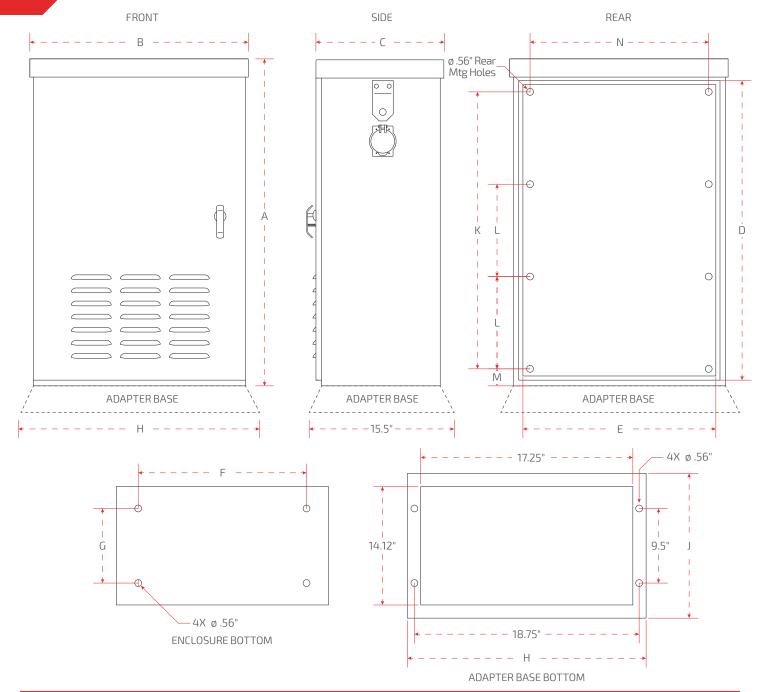

| Configurations | | | | | | | | | | | | | | |
|--|----------|----------|----------|----------|----------|----------------------|----------|----------|----------|-----------------------|----------|----------|----------|----------|
| Model | Exterior | | | Opening | | Pad Mounting Pattern | | | | Rear Mounting Pattern | | | | |
| | А | В | С | D | Е | F | G | Н | J | К | L | M | N | Holes |
| Style 1 for use with batteries only | 42" | 15" | 14.5" | 36.5" | 12.75" | 10" | 11" | – | _ | 32" | 16" | 6" | 12" | 6 |
| Style 2 for use with batteries only | 48" | 22" | 10" | 44.25" | 19.75" | 19" | 6" | 21.75" | 15.5" | 36" | 12" | 6" | 19" | 8 |
| Style 3 for use with UPS and batteries | 42" | 24" | 14" | 36.5" | 21.75" | 21" | 10" | 25.75" | 15.5" | 33" | 11" | 6" | 21" | 8 |
| BBS Service Pedestal | C | C | C | – | C | – | = | C | C | C | C | C | C | C |

Consult a Clary representative

© 2018 Clary Corporation. Specifications subject to change without notice.

